




PolySto PVC Skirting - PV15F

- Hygienic protection of wall panels in the food industry
- Protection against water infiltration to the wall panels
- Avoidance of hollow spaces that can contain bacteria
- Skirting of the wall/floor and wall/kerb junction

Application: food production rooms, catering, industrial kitchens, restaurants, supermarkets, cold rooms, clean rooms, behind machinery, sanitary rooms, washing rooms,...

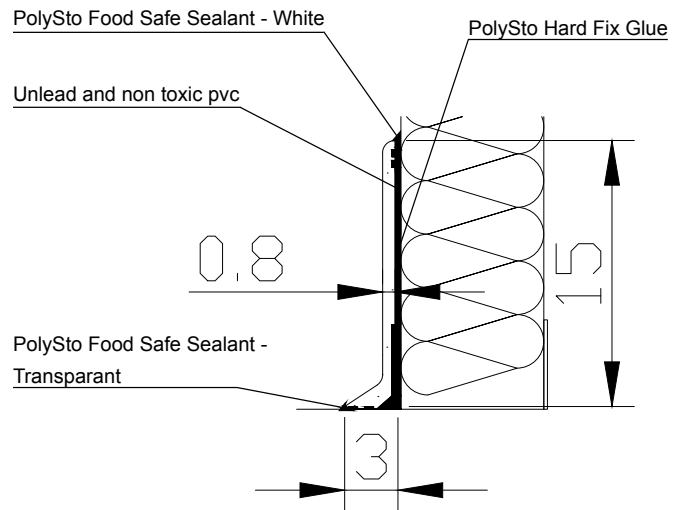

Specification

PolySto PV15F skirting is a prefabricated full core covered skirting 3000x150x30mmH with sloped top and skirting to wall-floor according the EU-requirements. The PV8F skirting consists of a non toxic unleaded PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant

Technical information


	<u>Skirting</u>	<u>Inner corner</u>	<u>External corner</u>
Length	300 cm	15 cm / 15 cm	15 cm / 15 cm
Height	15 cm	15 cm	15 cm
Thickness middle	0,8 cm	0,8 cm	0,8 cm
Thickness feet	3 cm	3 cm	3 cm
Weight	6 kg	0,5 kg	0,5 kg

Consumption


Sealant white	150 cc / m
Sealant transparent	75 cc / m
Hard Fix Glue	150 cc / m
Installation pegs	4 pc / m

Packing pallet


Dimensions	300x100x70cmH
Number of meters / pallet	250 pieces / 750 meter
Weight	1500 kg

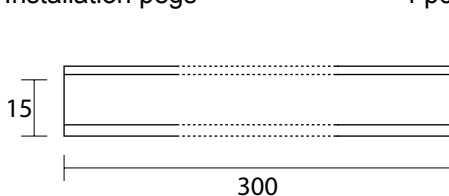

Skirting



Inner corner



External corner