




## PolySto PVC Skirting - PV8F

- Hygienic protection of wall panels in the food industry
- Protection against water infiltration to the wall panels
- Avoidance of hollow spaces that can contain bacteria
- Skirting of the wall/floor and wall/kerb junction

**Application:** food production rooms, catering, industrial kitchens, restaurants, supermarkets, cold rooms, clean rooms, behind machinery, sanitary rooms, washing rooms,...

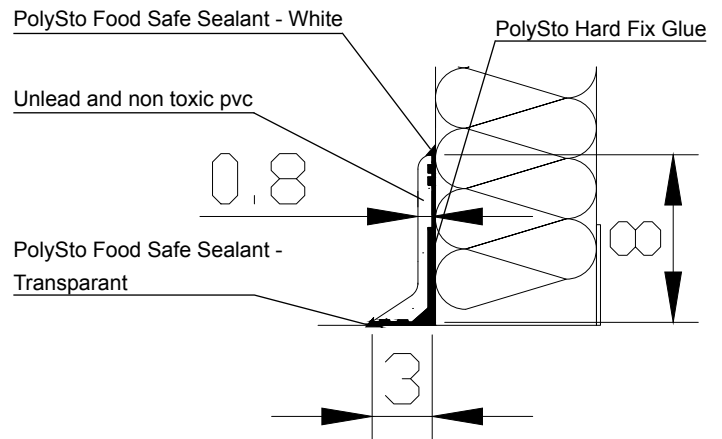

### Specification

PolySto PV8F skirting is a prefabricated full core covered skirting 300x80x30mmH with sloped top and skirting to wall-floor according the EU-requirements. The PV8F skirting consists of a non toxic unleaded PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant

### Technical information


	Skirting	Inner corner	External corner
Length	300 cm	15 cm / 15 cm	15 cm / 15 cm
Height	8 cm	8 cm	8 cm
Thickness middle	0,8 cm	0,8 cm	0,8 cm
Thickness feet	3 cm	3 cm	3 cm
Weight	3 kg	0,3 kg	0,3 kg

### Consumption


Sealant white	100 cc / m
Sealant transparent	75 cc / m
Hard Fix Glue	150 cc / m
Installation pegs	4 pc / m

### Packing pallet


Dimensions	300x100x70cmH
Number of meters / pallet	500 pieces / 1500 meter
Weight	1500 kg

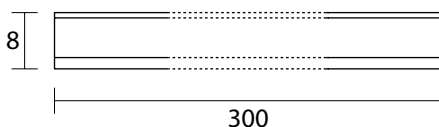

Skirting



Inner corner



External corner